

INSTRUCTIONS



WEATHER - BRAKE

2146

FITS

John Deere 2210




General Offices
1132 W. 1ST STREET
McPherson, KS 67460
Phone: (620) 241-3513
Web: www.femcomfg.com

Form No. 286309800 / 06-2003

IMPORTANT

CAREFULLY STUDY THE PHOTO DIAGRAMS SHOWING THE LOCATION OF EACH PART. LEAVE ALL HARDWARE LOOSE UNTIL INSTRUCTED TO TIGHTEN.

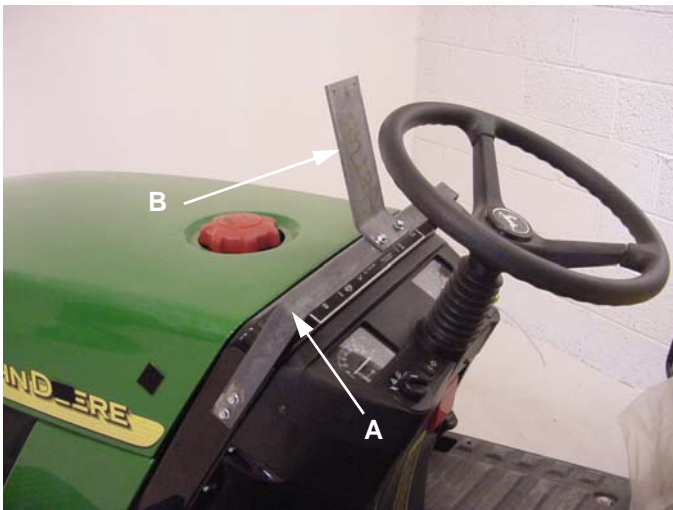

YOKE BRACKETS

1. Mark location of two (2) $9/32$ " diameter holes to be drilled. First hole is to be 1" down from seam on metal dash band and $2/4$ " from back edge. Second hole is to be 1" from first.
2. Repeat procedure for the other side.
3. Attach yoke bracket lower (A) to dash band using four (4) $1/4$ " x $3/4$ " bolts and nuts.
4. Attach yoke bracket upper (B) to toke bracket lower using two (2) $1/4$ " x $3/4$ " bolts and nuts.
5. Tigh ten bolts.

DOOR POSTS

1. Mark center of diamond tread and drill a $9/32$ " diameter hole all the way through the deck.
2. Attach left door post (A) to deck using one (1) $1/4$ " x 3" bolt and nut.
3. Use same procedure for right door post and attach to deck using one (1) $1/4$ " x $1\ 1/2$ " bolt and nut.





MOTOR COVER

1. Arrange motor cover over hood of tractor.
2. Slide 3" hems of motor cover down over door posts.

YOKE

1. Slide yoke (A) into top 3" hem of motor cover
2. Attach yoke to tops of door posts using two (2) 1/4" x 1" bolts and nuts. Heads of bolts inside, nuts to outside.
3. Tighten all bolts



Dual Lock™ a trademark of 3M Co.


1. Cut plastic Dual Lock™ into 2" lengths.
2. Surface must be cleaned with a mild detergent to assure proper application of Velcro strips.

NOTE: Do not peel the backing from the Dual Lock™ .

3. Apply cut Dual Lock™ to all Dual Lock™ sewn to motor cover.
4. Arrange motor cover to tractor. Peel backing from Dual Lock™ and apply to tractor. Repeat this procedure for all Dual Lock™ .

WINDSHIELD ASSEMBLY

1. Attach left and right window frames using two (2) #10 x 1/2" bolts and nuts.
2. Slide glass into the channel of the windshield.
3. Attach flat strip and angle strip to the windshield using two (2) #10 x 1/2" bolts and nuts.

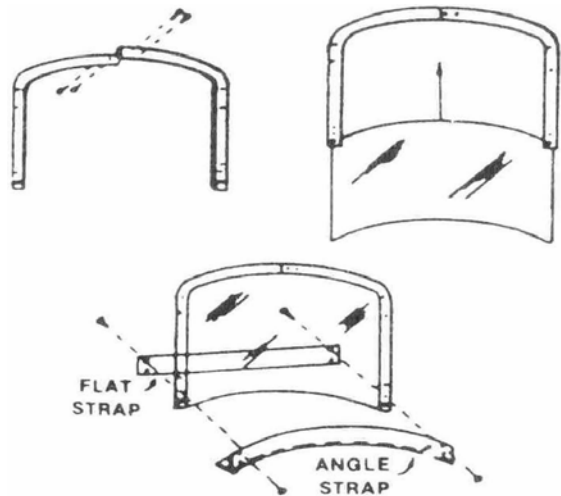

WINDSHIELD ATTACHMENT


1. Remove 1/4" nuts from top of door posts.
2. Attach assembled windshield (A) using same nuts removed.
3. TIGHTEN ALL BOLTS.



DOORS

1. Locate holes in door post and cut holes in fabric.
2. Hold door (A) to door post and bottom of windshield.
3. Mark location of holes in door post to door.
4. Cut 5/8" slots next to wire frame of door and attach to door posts using two (2) #10 x 3/4" bolts, F1 clips and nuts.
5. Tie door flap to straps on motor cover.
6. Repeat procedure for the other side and tighten bolts.



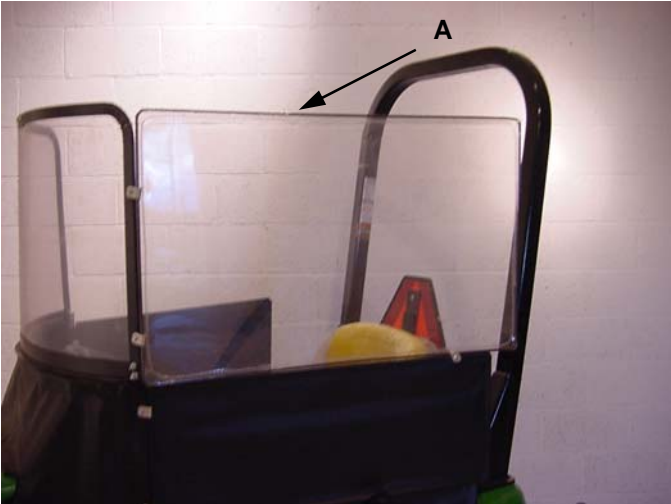

SIDE WINDOWS

1. Mark location of holes in windshield to side window (A).
2. Cut 5/8" slots next to wire frame of window and attach to windshield using two (2) #10 x 3/4" bolts, clips, and nuts.
3. At location (B), cut 5/8" slots inside window and door and attach using one (1) #10 x 3/4" bolt, clip, and nut.
4. Repeat procedure for the other side and tighten bolts.

DOOR LATCH

1. Attach door latches (A) to grab handle using "U" bolts and nuts.
2. Tighten all bolts



NOTES